



CABLE TERMINATION SYSTEM



HENG HARDWARE ENGINEERING PTE LTD

7 YISHUN INDUSTRIAL STREET 1, #01-48,
NORTHSRING BIZHUB, SINGAPORE 768162

TEL : (65) 6846 4111 FAX : (65) 6846 4222

Email : sales@heng.com.sg Website : www.heng.com.sg

Cable Glands

A2



GLAND REF & SIZE	TERMINATION THREAD SIZE (METRIC)	LENGTH OF THREAD "L"	CABLE DIAMETER (CD)	
			'MAX.'	'MIN.'
A2	16L	12	9.0	3.5
A2	20S	12	11.8	8.0
A2	20L	12	14.2	11.0
A2	25L	12	20.2	15.0
A2	32L	12	26.4	20.0
A2	40L	15	32.8	27.0
A2	50S	15	38.3	32.0
A2	50L	15	44.0	38.0
A2	63S	15	50.0	42.5
A2	63L	15	56.0	48.5
A2	75S	20	62.0	54.5
A2	75L	20	67.5	60.5

BW




GLAND REF & SIZE	TERMINATION THREAD SIZE (METRIC)	LENGTH OF THREAD "L"	CABLE DIAMETER (CD)	
			DIA INNER SHEATH MAX.	DIA OUTER SHEATH MAX.
BW	20S	10	11.8	15.8
BW	25S	10	17.0	23.0
BW	25L	10	19.8	27.0
BW	32L	10	26.4	33.5
BW	40S	15	29.0	36.0
BW	40L	15	32.4	41.0
BW	50S	15	38.0	46.3
BW	50L	15	44.0	52.6
BW	63S	15	49.0	61.5
BW	63L	15	55.5	65.3
BW	75S	20	62.0	73.0
BW	75L	20	67.0	78.0

Above cable diameter charts are given for glands selection purpose only. Our company shall not be responsible for cables that deviate materially from the nominal diameters given here.
All dimension in mm.



CW

GLAND REF & SIZE	TERMINATION THREAD SIZE (METRIC)	LENGTH OF THREAD "L"	CABLE DIAMETER (CD)	
			DIA INNER SHEATH MAX.	DIA OUTER SHEATH MAX.
CW	20S	10	11.8	15.8
CW	20L	10	13.8	20.5
CW	25S	10	17.0	23.0
CW	25L	10	19.8	27.0
CW	32L	10	26.4	33.5
CW	40S	15	29.0	36.0
CW	40L	15	32.4	40.1
CW	50S	15	38.0	46.3
CW	50L	15	44.0	52.5
CW	63S	15	49.0	59.5
CW	63L	15	55.5	65.3
CW	75S	20	62.0	73.0
CW	75L	20	67.0	78.5

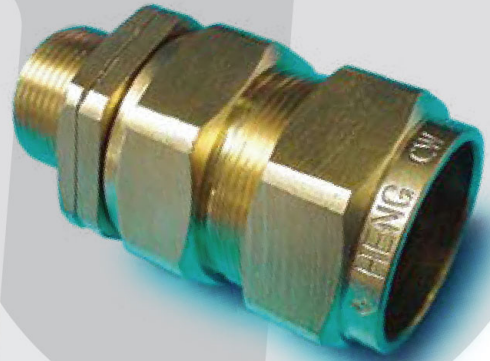

CW

Aluminium / Stainless Steel

SINGLE-CORE XLPE / AWA/ PVC CABLE				
CABLE SIZE (mm ²)	CABLE DIA. (mm)		GLAND SIZE	LENGTH OF TERMINATION THREAD (mm)
	I.D	O.D		
1 X 120	19.0	25.8	25L	10
1 X 150	21.0	27.8	25L	10
1 X 185	23.2	30.0	32L	10
1 X 240	26.0	33.0	40S	15
1 X 300	28.8	35.8	40S	15
1 X 400	32.7	40.7	40L	15
1 X 500	36.0	44.4	50S	15
1 X 630	40.4	49.0	50M	15
1 X 800	45.8	55.8	50L	15



Above cable diameter charts are given for glands selection purpose only. Our company shall not be responsible for cables that deviate materially from the nominal diameters given here.
All dimension in mm.



Cable Clamps & Miscellaneous Accessories



PVC Shroud

Size :
20mm to 90mm



Earth Tag

Available in brass, aluminium and stainless steel material.

Size :
20mm to 90mm



HT Cable Clamp

Aluminium Alloy Clamp

Type :
DC 90
DC 100



Cable Lug

Suitable for bare cable conductor terminations.

Size :
1.5mm² to 1000mm²



Multi-Purpose Clamp

Horizontally or Vertically secured onto edge of flat surface structure



Locknut

Available in brass, aluminium and stainless steel material.

Size :
20mm to 90mm



Two-Bolt Clamps

High tensile strength Aluminium Alloy material

Cable Dia. Size(mm)

50mm min.	-	60mm max.
60mm min.	-	70mm max.
80mm min.	-	90mm max.
90mm min.	-	100mm max.
100mm min.	-	115mm max.



Adaptor

Available in brass & aluminium material.

Size :
20mm to 90mm



Trefoil Cable Clamp

For securing 3 cables together

Cable Dia. Size(mm)

50mm² to 1000mm²



Stop Plug

Available in brass & aluminium material.

Size :
20mm to 90mm



Vinyl End Caps

Colour: Brown, Grey, Blue, Black and Green.

Cable Size

•1.5mm² to 630mm²



Reducer

Available in brass & aluminium material.

Size :
20mm to 90mm

All information shown in our HENG catalogue has been checked for accuracy at the time of printing. However, HENG does not provide any warranty of any kind, express or implied and we shall not be liable for any loss or damage that may result from any use of the information which the catalogue contains. HENG reserve the right to change and improve product design, descriptions, or any other information in the catalogue at any time without prior notice. Dimension in catalogue subjected to manufacturing tolerance.

Copyright

Unauthorized reproduction, copied or transmitted of information in HENG catalogue without our prior written permission, will be considered as infringement of Copyright and will result in legal action.

Updated March 2019

